



**FEATURES**


- Excellent linearity
- Extremely low noise
- Excellent return loss properties

**APPLICATIONS**

- Single module line extender in CATV systems operating In the 40 to 860 MHz frequency range.

**DESCRIPTION**

Hybrid high dynamic range integrated circuit operating at a supply voltage of 24 V (DC) in a SOT115J package. The Module consists of two cascaded stages both in cascode Configuration.

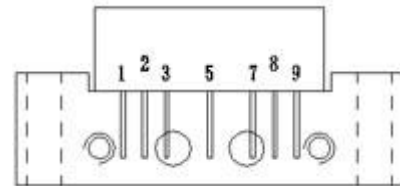

Side view

**Fig.1 Simplified outline**

**QUICK REFERENCE DATA**

| SYMBOL           | PARAMETER                      | CONDITIONS          | MIN. | MAX. | UNIT |
|------------------|--------------------------------|---------------------|------|------|------|
| G <sub>p</sub>   | Power gain                     | f=50MHz             | 19.5 | 20.9 | dB   |
|                  |                                | f=860MHz            | 21.0 | -    | dB   |
| I <sub>tot</sub> | Total current consumption (DC) | V <sub>B</sub> =24V | 200  | 235  | mA   |

**LIMITING VALUES**

In accordance with the Absolute Maximum Rating System (1EC 134).

| SYMBOL    | PARAMETER                           | MIN. | MAX. | UNIT |
|-----------|-------------------------------------|------|------|------|
| $V_B$     | Supply voltage                      | -    | 25   | V    |
| $V_i$     | RF input voltage                    | -    | 45   | dBmV |
| $T_{stg}$ | Storage temperature                 | -20  | +100 | °C   |
| $T_{mb}$  | Mounting base operating temperature | -20  | +100 | °C   |

 **CHARACTERISTICS**

Bandwidth 40 to 860 MHz;  $V_B=24V$ ;  $T_{case}=30^{\circ}C$  ;  $Z_s=Z_L=75\Omega$

| SYMBOL    | PARAMETER                         | CONDITIONS  | MIN. | MAX. | UNIT |
|-----------|-----------------------------------|---|------|------|------|
| $G_p$     | Power gain                        | f=50MHz   | 19.5 | 20.9 | dB   |
|           |                                   | f=860MHz  | 21   | -    | dB   |
| SL        | Slope cable equivalent            | f=40 to 860 MHz   | 0.5  | 2.5  | dB   |
| FL        | Flatness of frequency response    | f=40 to 860 MHz   | -    | ±0.5 | dB   |
| $S_{11}$  | Input return losses               | f=40 to 80 MHz  | 18   | -    | dB   |
|           |                                   | f=80 to 160 MHz   | 18   | -    | dB   |
|           |                                   | f=160 to 320 MHz  | 18   | -    | dB   |
|           |                                   | f=320 to 750 MHz  | 18   | -    | dB   |
|           |                                   | f=750 to 860 MHz  | 16   | -    | dB   |
| $S_{22}$  | Output return losses              | f=40 to 80 MHz  | 14   | -    | dB   |
|           |                                   | f=80 to 160 MHz   | 14   | -    | dB   |
|           |                                   | f=160 to 320 MHz  | 14   | -    | dB   |
|           |                                   | f=320 to 750 MHz  | 14   | -    | dB   |
|           |                                   | f=750 to 860 MHz  | 12   | -    | dB   |
| CTB       | Composite triple beat             | 84 channels flat; $V_o=44dBmV$ ; measured at 743.25 MHz | -    | -55  | dB   |
| $X_{mod}$ | Cross modulation                  | 84 channels flat; $V_o=44dBmV$ ; measured at 49.75 MHz  | -    | -60  | dB   |
| CSO       | Composite second order distortion | 84 channels flat; $V_o=44dBmV$ ; measured at 744.25 MHz | -    | -55  | dB   |
| $d_2$     | Second order distortion           | Note1   | -    | -64  | dB   |
| $V_o$     | Output voltage                    | Dim= -60 dB; note 2                                     | 57.5 | -    | dBmV |
| F         | Noise figure                      | f=860MHZ  | -    | 6.5  | dB   |

|           |                                |                   |     |     |    |
|-----------|--------------------------------|-------------------|-----|-----|----|
| PM        | Positive match                 | f=40 MHz to 2 GHz | -   | 3   | dB |
| $I_{tot}$ | Total current consumption (DC) | Note 3            | 200 | 235 | mA |

**Note :**

1.  $f_p=49.75\text{MHz}$ ;  $V_p=44\text{dBmV}$ ;  
 $f_q=8.7.25\text{MHz}$ ;  $V_q=44\text{dBmV}$ ;  
 measured at  $f_p+f_q=857.00\text{MHz}$ .
2. Measured according to DIN45004B;  
 $f_p=847.25\text{MHz}$ ;  $V_p=V_o$ ;  
 $f_q=855.25\text{MHz}$ ;  $V_q=V_o-6\text{dB}$ ;  
 $f_r=857.25\text{MHz}$ ;  $V_r=V_o-6\text{dB}$ ;  
 measured at  $f_p+f_r-f_q=849.25\text{MHz}$ .
3. The module normally operates at  $V_B=24\text{V}$ ,but is able to withstand supply transients up to 28 V.

 PACKAGE OUTLINE

Rectangular single-ended package; aluminum flange; 2 vertical mounting holes; 2×6-32 UNC AND 2 extra horizontal mounting holes; 7 gold-plated in-line leads

