

## 860MHz 23dB Gain CATV forward Integrated Circuit

### ★ FEATURES

- Excellent linearity
- Excellent distortion performance
- Extremely low noise
- Excellent return loss properties

### ★ APPLICATIONS


For CATV systems operating over a frequency range of 40 to 860MHz.

### PINNING — SOT115J

PIN	DESCRIPTION
1	Input
2	Common
3	Common
5	+VB
7	Common
8	Common
9	Output

### ★ DESCRIPTION

KF887Z-24 in a SOT115J package, operating at a supply voltage of 24V(DC), and intended for use as a line-extender.

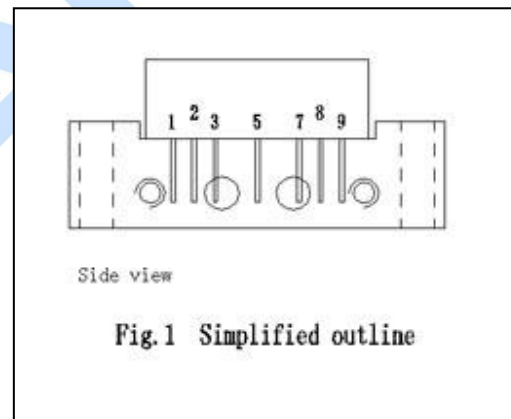

### ★ QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
G <sub>p</sub>	power gain	f=50MHz	22.5	23.0	23.9	dB
		f=860MHz	23.0	-	-	dB
I <sub>tot</sub>	total current consumption (DC)	VB= +24V	200	210	235	mA

## 860MHz 23dB Gain CATV forward Integrated Circuit

### ★ LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
VB	supply voltage	-	25	V
V <sub>i</sub>	RF input voltage	-	55	dBmV
T <sub>stg</sub>	storage temperature	-20	+100	°C
T <sub>mb</sub>	operating mounting base temperature	-40	+100	°C

### ★ CHARACTERISTICS

Bandwidth 40 to 860MHz; VB = +24 V; T<sub>mb</sub> = 25 °C; Z<sub>S</sub> = Z<sub>L</sub> = 75 Ω .


SYMBOL	PARAMETER	CONDITIONS	MIN	Typ	MAX	UNIT
G <sub>p</sub>	power gain	f=50MHz	22.5	23.0	23.9	dB
SL	slope cable equivalent	f=50 to 860MHz	0.5	1.0	2.0	dB
FL	flatness of frequency response	f=50 to 860MHz	-	-	±0.4	dB
S <sub>11</sub>	input return losses	f=40 to 700MHz	18	-	-	dB
		f=700 to 860MHz	16	-	-	
S <sub>22</sub>	output return losses	f=40 to 700 MHz	16	-	-	dB
		f=700 to 860MHz	14	-	-	
CTB	composite triple beat	60channels	-	-62	-	dB
CSO	composite second order distortion	Flat output level across the band. Vo=44dBmV at 543.25 MHz,	-	-64	-	dB
X <sub>mod</sub>	cross modulation		-	-62	-	dB
F	noise figure	f=860MHz	-	-	7.5	dB
I <sub>tot</sub>	total current consumption (DC)	VB=+24V	200	210	235	mA

## 860MHz 23dB Gain CATV forward Integrated Circuit

### ★ PACKAGE OUTLINE

Rectangular single-ended package; aluminium flange; 2 vertical mounting holes;  
2 x 6-32 UNC and 2 extra horizontal mounting holes; 7 gold-plated in-line leads

SOT115J

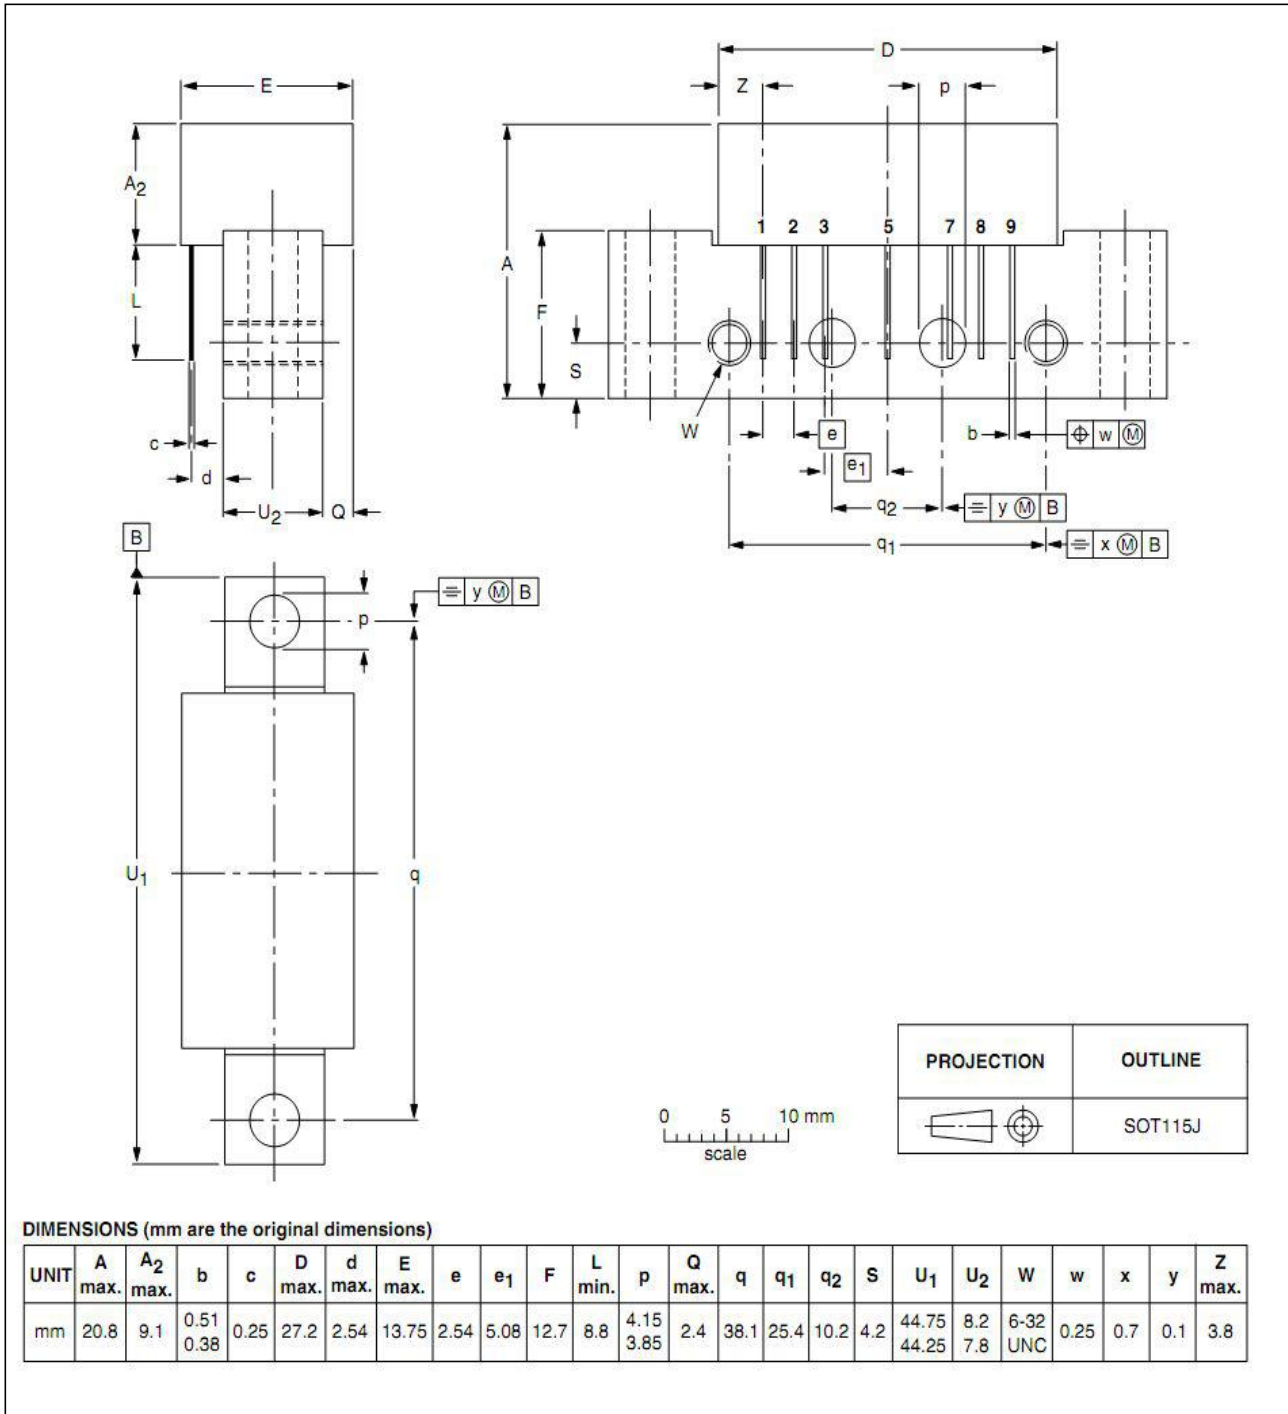

UNIT: mm